




# ACM-1511

## Megapixel Indoor IP IR Bullet Camera




\* The bracket is not included.

- 1/3" Micron Progressive Scan CMOS
- Day and night function with Mechanical IR Cut Filter
- Integrated f3.3 ~ 12 mm / F1.6 MegaPixel lens
- Selectable MPEG-4 / MJPEG compression
- Up to SXGA resolution at 8 FPS
- Multi-stream with variable frame rate in the same compression
- Two-way audio supported
- Hardware motion detection
- DC 12 V or Power over Ethernet (IEEE 802.3af) supported

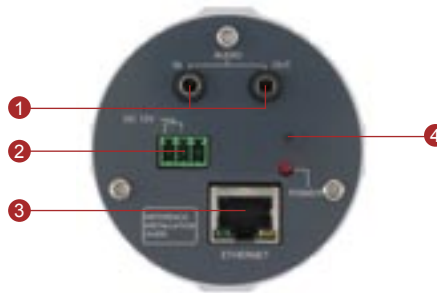

- ① Audio Input / Output
- ② DC 12 V Power Input
- ③ Ethernet Port
- ④ Reset Button

### DIMENSION DIAGRAM

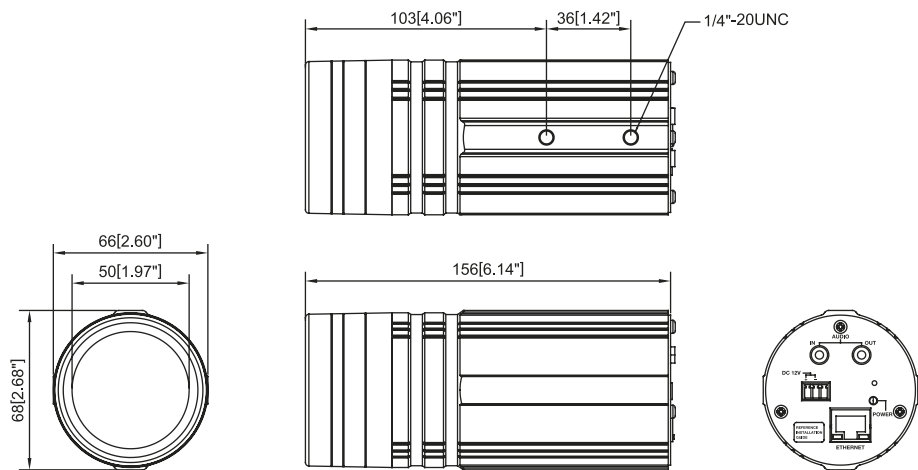

Unit: mm [inch]



## PRODUCT SPECIFICATION

		ACM-1511
Image	Device	Micron Progressive Scan CMOS
	Size	1/3 inch
	Effective Pixels	1280 x 1024
Min. Scene Illumination	Color	Color mode automatically switched to B/W mode under 4 Lux
	B/W	0 Lux (IR LED ON)
	IR Sensitivity	from 700 nm to 1100 nm
	IR LED	IR LED x24 (850 nm)
	CDS Sensor	Yes
	IR Working Distance	20 ~ 30 M (30 IRE)
Lens	Lens	f3.3 ~ 12 mm / F1.6
	Viewing Angle	89.8° ~ 23.9° (Horizontal)
Synchronization	Sync. System	Internal
Day/Night Functions	Mechanical IR Cut Filter	Yes
Functions	Motion Detection	Yes (3 Windows)
	Electronic Shutter	1/5 ~ 1/2,000 sec. (60 Hz); 1/5 ~ 1/2,000 sec. (50 Hz)
	Flickerless	1/120 sec. (60 Hz); 1/100 sec. (50 Hz)
	BLC	Yes
	AGC	Automatic (user defined)
	White Balance	6 Modes (AUTO,INDOOR1,INDOOR2,OUTDOOR1,OUTDOOR2, HOLD CURRENT,MANUAL) Configurable
S/N Ratio	S/N Ratio	Better than 44 dB
Video Compression	Compression	MPEG-4 SP, MJPEG selectable
	Picture Resolution	SXGA (1280x1024); HD720 (1280x720); VGA (640x480); QVGA (320 x 240); QQVGA (160 x 120)
	Image Frame Rate	SXGA at 8 fps; HD720 at 10 fps; VGA at 30 fps; QVGA at 30 fps; QQVGA at 30 fps
Audio Input	Compression	8kHz, Mono, PCM
	Audio Line Input	Unbalanced, 1.4Vp-p, 1Vrms, 3.5 mm Phone Jack
Audio Output	Compression	8kHz, Mono, PCM
	Audio Line Output	Unbalanced, 1.4Vp-p, 1Vrms, 3.5 mm Phone Jack
External I/O	Reset Button	Factory default
	LED	System status
Network	Ethernet	Ethernet(10/100 Base-T), RJ-45 connector
	Protocol	TCP, UDP, IP, HTTP, DHCP, PPPoE, RTP, RTSP,FTP,SMTP,DNS,DDNS,NTP,ICMP,IGMP,ARP,3GPP
Software	Web Browser	Microsoft Internet Explorer 6.0 or above
	SDK	ACTi SDK-10000
	Security	Password protection: configured by the administrator
Operating	Temperature	0 °C ~ 50 °C (32 ~ 122 °F)
Power	Power Requirement	PoE(IEEE802.3af) with class 3
	Power Consumption	3.72 W (DC12V) w/ IR ON 4.8 W (PoE) w/ IR ON
Physical	Dimensions (WxHxD)	66 mm x 156 mm (2.6" x 6.14")
	Weight	505 g (1.11 b)

## ORDERING INFORMATION

Model Name	Description
ACM-1511	Megapixel Indoor IP IR Bullet Camera

## ACCESSORY OPTIONS

- Camera bracket 69-GL220E-R0



69-GL220E-R0