



DX Series Hybrid DVR Server

Analog + IP Cameras

Support up to maximum: 64CH Analog, 16 HD IP, 5TB Dedicated Video Storage

Product Description:

The Hybrid DVR Server is an advanced security solution that integrates with the latest, state of the art IP video surveillance cameras on a single 4U rack mount system. The powerful, yet easy to operate user interface enables IP surveillance cameras to work together within the application. Each server can accommodate up to 64CH analog video and 8 HD IP cameras license. It's also support High Definition CCTV cameras up to 8 megapixels. Hybrid surveillance system powered by NUUO.



Advanced and
Comprehensive

Features:

- Multiple IP camera
- Support GSF™ High Definition CCTV Solutions, and high resolutions megapixels cameras
- User friendly "GUI Recording Schedule" interface
- Intelligent detection and instant response
- Smart Guard system, includes motion, missing objects, foreign objects, and more
- Counting application for people and traffic amount control
- Intelligent search for easy locating of recorded events
- Video enhancement tools
- Easy-to-use, powerful export features
- PTZ reaction presets and distance operations
- Optional, I/O device integration
- Popup E-map
- Optional CMS Software for centralized control station
- Easy camera setup




HYBRID
CCTV Solutions

Supported IP cameras:



Complete list of supported IP cameras at <http://www.nuuo.com/support.php>

Intelligent Detection and Instant Response

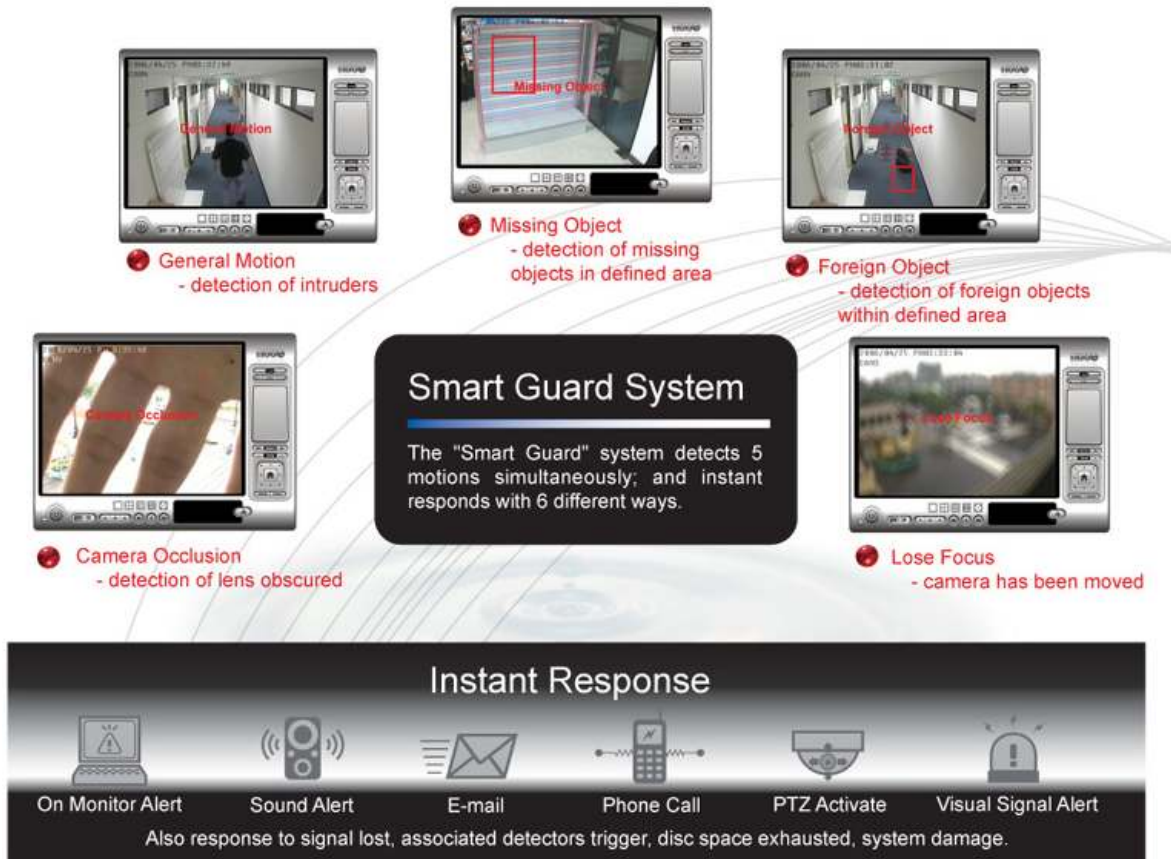

General Specification:

<p>IP Video: 1,4, or 8CH High-Def IP video license, or 16CH VGA IP Video license Resolutions: up to 8Mpix</p> <p>Analog Video: 8CH, 12CH, 16CH, 24CH, 32CH, 48CH, 64CH Resolutions: up to D1 (704x576) NUUO SCB-4016 Series DVR Card (NU4) NUUO SCB-5000 Series DVR Card (NU5)</p> <p>Recording: Schedule recording Event triggered recording Motion, Continuous recording</p> <p>Video Analytics: General motion, missing object, foreign object, camera occlusion, lose focus, and signal lost, counting</p> <p>Alerting: On Screen alert, audio alert, Email alert, PTZ activate, Phone alert (optional), I/O signal alert (optional)</p> <p>Playback: Simultaneous playback 16CH(max) Regular playback Search mode with analytic feature</p>	<p>Backup: Ready view export to USB drive Image export (JPEG) Video export (.avi)</p> <p>User Account: Password restriction on user rights</p> <p>Ethernet: Dual 10/100/1000 Base-T</p> <p>Video Storage: Half to 5 Terabytes (TB), or</p> <p>Dimension: 4U Rack mount Chassis 482(W) x 480(D) x 178(H) mm</p>
--	---

Available Models: NUX-DXAADD-SS

X: NU4 with NUUO SCB4016 (MPEG4)
NU5 with NUUO SCB5000 series (H.264)

AA: 8, 12, 16, 24, 32, 48CH, 64CH Analog Video

DD: 4CH, 8CH, 16CH HD IP Cameras License

SS: 500GB, 1-5TB Dedicated Video Storage