



64ch Hybrid NDVR for IP and Analog Camera

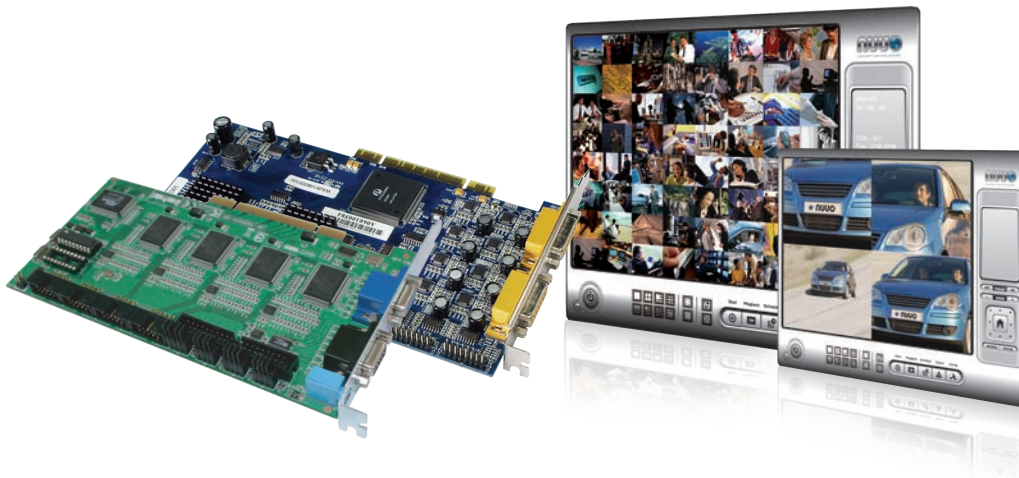

- 64 channels from IP and analog cameras
- Support megapixel IP camera
- Support H.264 compression format
- Triple monitor display
- Synchronized with Joystick
- E-map and GUI recording schedule
- Digital PTZ and multiple viewer
- Smart detection of 6 events and 10 instant responses
- Playback system with 5 intelligent search
- POS and I/O device integration
- Remote live viewer, playback, backup, I/O control, desktop config.
- Supported by NUUO Central Management System
- Supports 31 brands of IP cameras and more than 520 models

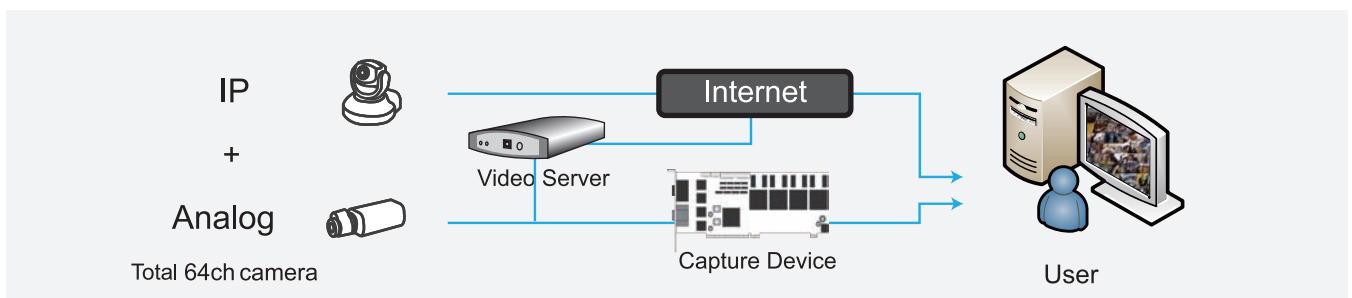

Specification


Total Channel	Analog ch	IP ch	SCB Series Capture Card (For Analog Channel)	IP+ Series License (For IP Channel)
64	48	16	SCB-5016x3	SCB-IP+16
	32	32	SCB-5016x2/ SCB-3016x2	SCB-IP+32
	16	48	SCB-5016/ SCB-4016/ SCB-3016	SCB-IP+32 & SCB-IP+16
	8	56	SCB-5008/ SCB-3008/ SCB-2008/ SCB-1008	SCB-IP+32 & SCB-IP+16 & SCB-IP+8
	4	60	SCB-5004/ SCB-3004/ SCB-2004/ SCB-1004	SCB-IP+32 & SCB-IP+16 & SCB-IP+12

How to choose

*Supported Languages:


Chinese (Simplified), Chinese (Traditional), Czech, Danish, English, Farsi, Finnish, French, German, Greek, Hebrew, Hungarian, Italian, Japanese, Korean, Portuguese (Brazil), Portuguese (Portugal), Russian, Slovak, Spanish, Thai, Turkish

SCB Series PC Based DVR

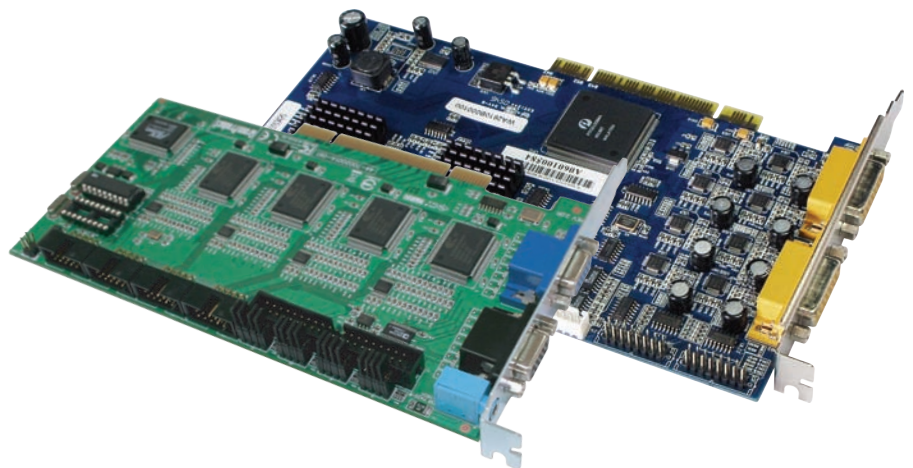

H.264 Hardware Compression
&
MPEG-4 Software Compression

- 64 channels from analog cameras
- Support megapixel IP camera
- Support H.264 compression format
- Triple monitor display
- Synchronized with Joystick
- E-map and GUI recording schedule
- Digital PTZ and multiple viewer
- Smart detection of 6 events and 10 instant responses
- Playback system with 5 intelligent search
- POS and I/O device integration
- Remote live viewer, playback, backup, I/O control, desktop config.
- Supported by NUUO Central Management system
- Supports 31 brands of IP cameras and more than 520 models

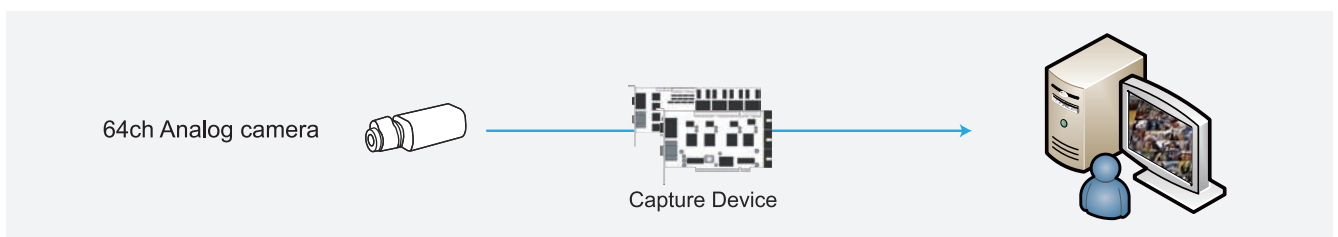




Specification

Channel Number	5000 series (H.264 hardware compression)	4000 series	3000 series (MPEG4 software compression)	2000 series	1000 series
4	SCB-5004	X	SCB-3004	SCB-2004	SCB-1004
8	SCB-5008	X	SCB-3008	SCB-2008	SCB-1008
16	SCB-5016	SCB-4016	SCB-3016	SCB-2008x2	SCB-1008x2
32	SCB-5016x2	X	SCB-3016x2	SCB-2008x4	SCB-1008x4
64	SCB-5016x4	X	X	X	X


How
to
choose
➔

*Supported Languages:
Chinese (Simplified), Chinese (Traditional), Czech, Danish, English, Farsi, Finnish, French, German, Greek, Hebrew, Hungarian, Italian, Japanese, Korean, Portuguese (Brazil), Portuguese (Portugal), Russian, Slovak, Spanish, Thai, Turkish


H.264 Hardware Compression Capture Card SCB 5000 Series

Product Name:	SCB-5004	SCB-5008	SCB-5016
Video Inputs	4	8	16
Audio Inputs	4	8	16
Max. Cards Installation	4	4	4
Display Rate (NTSC/PAL)	120fps, 100fps *	240fps, 200fps *	480fps, 400fps *
Recording Rate [CIF] (NTSC/PAL)	120fps, 100fps *	240fps, 200fps *	480fps, 400fps *
Video Resolution (NTSC)		352 x 240, 528 x 320, 704 x 480	
Video Resolution (PAL)		352 x 240, 528 x 320, 704 x 480	
Dimensions (W x H mm)	154 x 95	201 x 109	265 x 125
Product Image	 * supports 1 ch @ D1 resolution	 * supports 2ch @ D1 resolution	 * supports 4ch @ D1 resolution


MPEG 4 Software Compression Capture Card SCB 4000 Series

Product Name:	SCB-4016
Video Inputs	16
Audio Inputs	16
Max. Cards Installation	1
Display Rate (NTSC/PAL)	480fps, 400fps
Recording Rate [CIF] (NTSC/PAL)	480fps, 400fps
Video Resolution (NTSC)	352 x 240, 704 x 480
Video Resolution (PAL)	352 x 288, 704 x 576
Dimensions (W x H mm)	193 x 130
Product Image	

MPEG 4 Software Compression Capture Card SCB 3000 Series

Product Name:	SCB-3004	SCB-3008	SCB-3012	SCB-3016
Video Inputs	4	8	12	16
Audio Inputs	4	4	4	4
Max. Cards Installation	2	2	2	2
Display Rate (NTSC/PAL)		120fps, 100fps		
Recording Rate [CIF] (NTSC/PAL)		120fps, 100fps		
Video Resolution (NTSC)		352 x 240, 640 x 480, 704 x 480		
Video Resolution (PAL)		352 x 288, 640 x 576, 704 x 576		
Dimensions (W x H mm)		200 x 120		
Product Image				

MPEG 4 Software Compression Capture Card SCB 2000 Series

Product Name:	SCB-2004	SCB-2008
Video Inputs	4	8
Audio Inputs	2	2
Max. Cards Installation	4	4
Display Rate (NTSC/PAL)		60fps, 50fps
Recording Rate [CIF] (NTSC/PAL)		60fps, 50fps
Video Resolution (NTSC)		352 x 240, 640 x 480, 704 x 480
Video Resolution (PAL)		352 x 288, 640 x 576, 704 x 576
Dimensions (W x H mm)		200 x 120
Product Image		

MPEG 4 Software Compression Capture Card SCB 1000 Series

Product Name:	SCB-1004	SCB-1008
Video Inputs	4	8
Audio Inputs	1	1
Max. Cards Installation	4	4
Display Rate (NTSC/PAL)		30fps, 25fps
Recording Rate [CIF] (NTSC/PAL)		30fps, 25fps
Video Resolution (NTSC)		352 x 240, 640 x 480, 704 x 480
Video Resolution (PAL)		352 x 288, 640 x 576, 704 x 576
Dimensions (W x H mm)		155 x 120
Product Image		